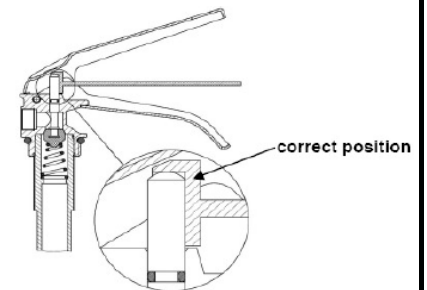
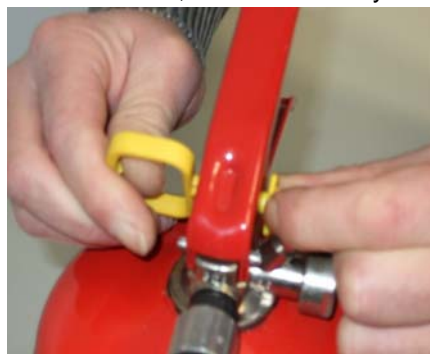


Process for testing the extension of the valve bolt and change the lever**Tools:****New lever, red, or black**
for orders use order form**1. Remove the safety pin****2. Insert the gauge horizontal to check the extension of the bolt****3. No gap = extension is acceptable****4. Gap = change the lever****5. Remove the dowel pin****6. Assemble handle and new lever****7. After check, assemble safety devices and put a red dot on the handle****Attention! Red dot on every checked extinguisher.**